





# LED Down Light (8")

**Dimension:** 







Specification						
Model No.	LOR-DLC218R32F8-8	LOR-DLN218R32F8-8	LOR-DLW218R32F8-8			
Input Voltage	AC100-240V					
Rated Power	32W	32W	32W			
Luminous Flux	2720lm	25601m	2400lm			
Luminous Efficiency	85 lm/W	80 lm/W	75 lm/W			
Color Temperature (CCT)	6000±500K	4000±500K	3000±500K			
CRI	Ra80					
Working Temperature Rang	-20°C~ +40°C					
Power Factor	>0.9					
Life Time	$\geq$ 40000 hrs					
Beam angle	110°					
Cut-out	158mm					
Dimensions(Dia*H) /Weight	Ø225(D) *33.0 (H) mm / 450±20 g					
LED driver	Fixed output					
Materials and Finishing	PC diffuser with high light transmission,					
	High reflectance aluminum reflector (White Color)					

Remarks

1.The tolerance of luminous flux is ±10%. 2.The dimension tolerance is ±5mm.


3.The appearance and specifications of the product may be modified for improvement without notice.


4.All parameters of products are based on the measurement of Laster Tech laboratory. Laster Tech Corporation LTD. Building F No.4, Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.0

www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196




## **Light Distribution Curve**





## **Installation Instruction**



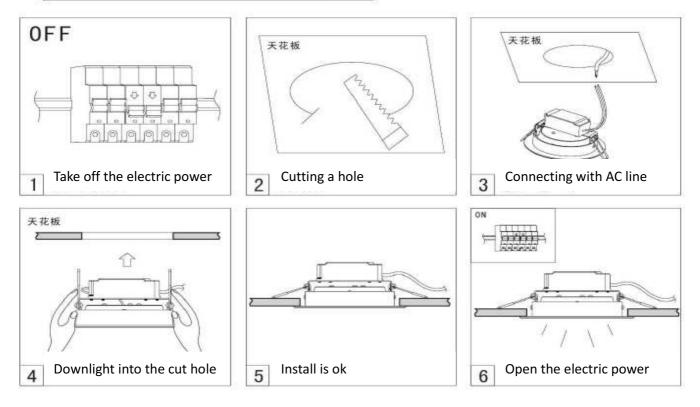

Laster Tech Corporation LTD. Building F No.4, Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.0 www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196



#### Attention

- 1.Don't expose this luminaire at the high temperature and high humidity environment.
- 2.Don't connect this luminaire to the higher voltage than maximum input voltage as specification, otherwise the diver will be damaged. The maximum input voltage for AC100~265V/50~60Hz
- 3After opening the box, check inside all the accessories that need to be set up.
- 4. Any material used to fix and support the lighting should be strong and non to ensure safety.
- 5.When installing the lighting, please make sure the safety space above the lighting up to the ceiling. (The suggested minimum distance is 35cm.) Keep the lighting away from any flammable items and make Sure the ventilation is good.
- 6.Start the installation or maintenance only after disconnecting the power.
- 7. To ensure safety, the installation is suggested to be done by professional technicians.

#### Package

Packing	Dimension(mm)	Quantity(pcs)	Net Weight(kg)	Gross Weight(kg)
Large Carton	530*325*490	20	9.0	13.02