




## LED T8 Working Ceiling Lamp

Dimension:

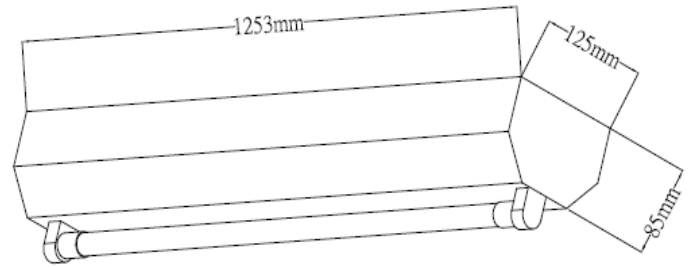

### Specification

Model No.	LM-T8CS1812F8-M	LM-T8NS1812F8-M	LM-T8WS1812F8-M
Input Voltage	AC 100 ~ 265V	AC 100 ~ 265V	AC 100 ~ 265V
Rated Power	18 W $\pm$ 10%	18 W $\pm$ 10%	18 W $\pm$ 10%
Usable Lumens	2150 lm	1950 lm	1950 lm
Lumens Efficiency	120lm/W	110 lm/W	110lm/W
Color Temp.	6000 $\pm$ 500 K	4000 $\pm$ 500 K	3000 $\pm$ 500 K
CRI	80	80	80
Power Factor	>0.9	>0.9	>0.9
Base	G13	G13	G13
Operating Temp.	-20 $^{\circ}$ C~40 $^{\circ}$ C	-20 $^{\circ}$ C~40 $^{\circ}$ C	-20 $^{\circ}$ C~40 $^{\circ}$ C
Beam Angle	140 $^{\circ}$ $\pm$ 10%	140 $^{\circ}$ $\pm$ 10%	140 $^{\circ}$ $\pm$ 10%
Life Time	40000 hrs	40000 hrs	40000 hrs
Dimensions	1253(L)*125(W)*85(H) mm	1253(L)*125(W)*85(H) mm	1253(L)*125(W)*85(H) mm
Weight	2.6kg $\pm$ 20 g	2.6kg $\pm$ 20 g	2.6kg $\pm$ 20 g
Lens Type	Foggy	Foggy	Foggy

Remarks

1. The tolerance of luminous flux is  $\pm$ 10%.
2. The dimension tolerance is  $\pm$ 5mm.
3. Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.