




## LED T8 Working Ceiling Lamp



Dimension :

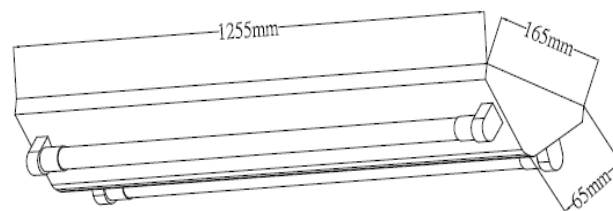

### Specification

Model No.	LM-T8CS3612F8-M	LM-T8NS3612F8-M	LM-T8WS3612F8-M
Input Voltage	AC 100 ~ 265V	AC 100 ~ 265V	AC 100 ~ 265V
Rated Power	36 W $\pm$ 10%	36 W $\pm$ 10%	36 W $\pm$ 10%
Usable Lumens	4320 lm	3950 lm	3950 lm
Lumens Efficiency	120lm/W	110 lm/W	110 lm/W
Color Temp.	6000 $\pm$ 500 K	4000 $\pm$ 500 K	3000 $\pm$ 500 K
CRI	80	80	80
Power Factor	>0.9	>0.9	>0.9
Base	G13	G13	G13
Operating Temp.	-20 $^{\circ}$ C~40 $^{\circ}$ C	-20 $^{\circ}$ C~40 $^{\circ}$ C	-20 $^{\circ}$ C~40 $^{\circ}$ C
Beam Angle	140 $^{\circ}$ $\pm$ 10%	140 $^{\circ}$ $\pm$ 10%	140 $^{\circ}$ $\pm$ 10%
Life Time	40000 hrs	40000 hrs	40000 hrs
Dimensions	1255(L)*165(W)*65(H) mm	1255(L)*165(W)*65(H) mm	1255(L)*165(W)*65(H) mm
Weight	3.0kg $\pm$ 20 g	3.0kg $\pm$ 20 g	3.0kg $\pm$ 20 g
Lens Type	Foggy	Foggy	Foggy

Remarks

1.The tolerance of luminous flux is  $\pm$ 10%.

2. The dimension tolerance is  $\pm$ 5mm.

3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.