




24W LED Down Light (Square)

Dimension:

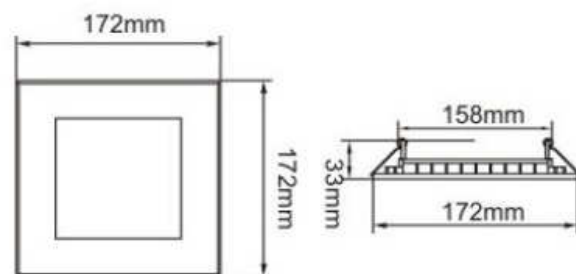


Specification			
Model No.	LOR-DLC216S24F8	LOR-DLN216S24F8	LOR-DLW216S24F8
Input Voltage	AC100-240V		
Rated Power	24W	24W	24W
Luminous Flux	2040lm	1920lm	18200lm
Luminous Efficiency	85 lm/W	80 lm/W	75 lm/W
Color Temperature (CCT)	6000±500K	4000±500K	3000±500K
CRI	Ra80		
Working Temperature Rang	-20°C~ +40°C		
Power Factor	>0.9		
Life Time	≥ 40000 hrs		
Beam angle	110°		
Cut-out	158mm		
Dimensions /Weight	172.0 *172.0*33.0 mm / 460±20 g		
LED driver	Fixed output		
Materials and Finishing	PC diffuser with high light transmission, High reflectance aluminum reflector (White Color)		

Remarks


- 1.The tolerance of luminous flux is ±10%. 2.The dimension tolerance is ±5mm.
- 3.The appearance and specifications of the product may be modified for improvement without notice.
- 4.All parameters of products are based on the measurement of Laster Tech laboratory.

Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.0


LUMINOUS INTENSITY DISTRIBUTION

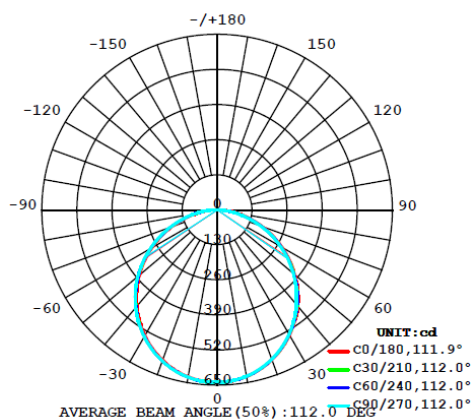

照度距离曲线/Illumination distance curve

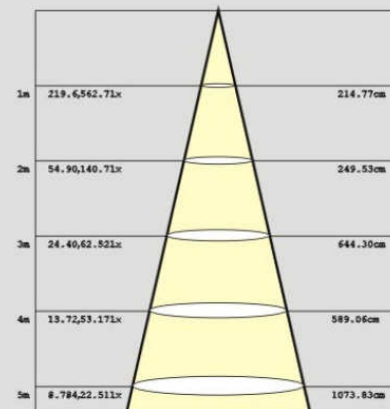

Installation Instruction

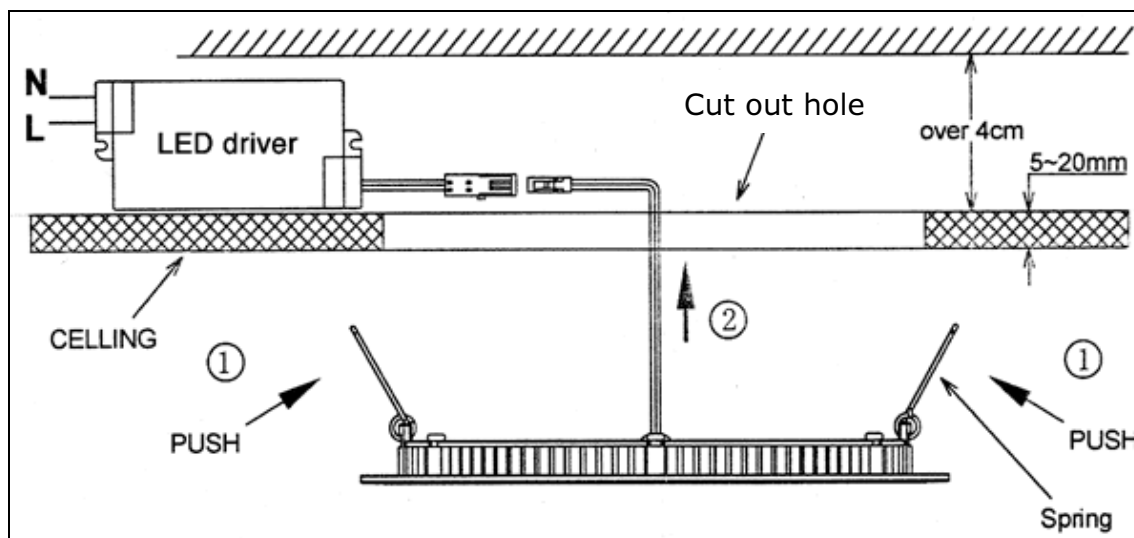


Product Package

Packing	Dimension(mm)	Quantity(pcs)	Net Weight(kg)	Gross Weight(kg)
Large Carton	560*275*525	30	13.80	20.13



24W LED Down Light (Square)

Dimension:

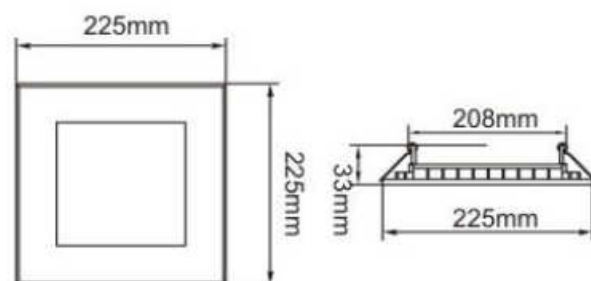

Specification			
Model No.	LOR-DLC218S24F8	LOR-DLN218S24F8	LOR-DLW218S24F8
Input Voltage	AC100-240V		
Rated Power	24W	24W	24W
Luminous Flux	2040lm	1920lm	1800lm
Luminous Efficiency	85 lm/W	80 lm/W	75 lm/W
Color Temperature (CCT)	6000±500K	4000±500K	3000±500K
CRI	Ra80		
Working Temperature Rang	-20°C~ +40°C		
Power Factor	>0.9		
Life Time	≥ 40000 hrs		
Beam angle	110°		
Cut-out	208mm		
Dimensions /Weight	225.0 *225.033.0 mm / 520±20 g		
LED driver	Fixed output		
Materials and Finishing	PC diffuser with high light transmission, High reflectance aluminum reflector (White Color)		


Remarks

- 1.The tolerance of luminous flux is ±10%. 2.The dimension tolerance is ±5mm.
- 3.The appearance and specifications of the product may be modified for improvement without notice.
- 4.All parameters of products are based on the measurement of Laster Tech laboratory.


Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.0

www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196


LUMINOUS INTENSITY DISTRIBUTION

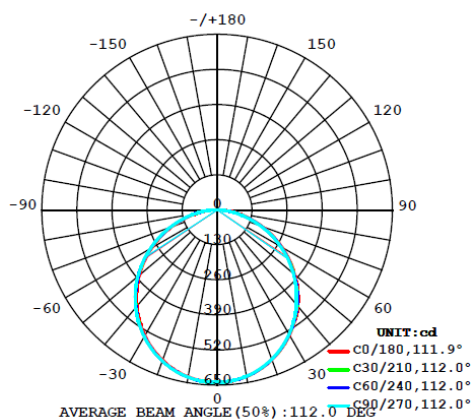

照度距离曲线/Illumination distance curve

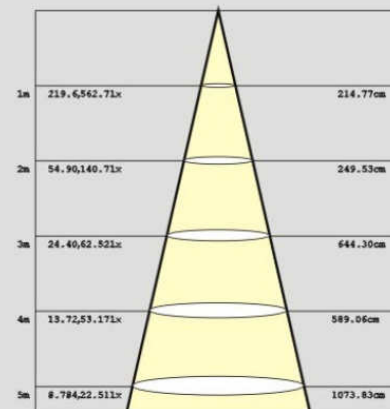

Installation Instruction

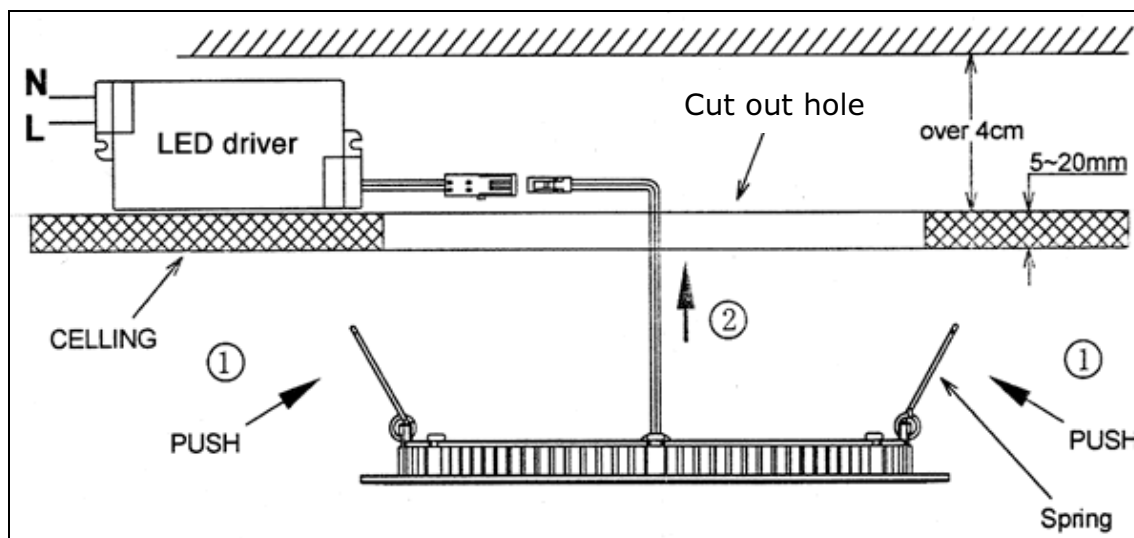

Product Package

Packing	Dimension(mm)	Quantity(pcs)	Net Weight(kg)	Gross Weight(kg)
Large Carton	530*325*490	20	10.43	14.37