




LED Ceiling Light (22W)

Dimension:

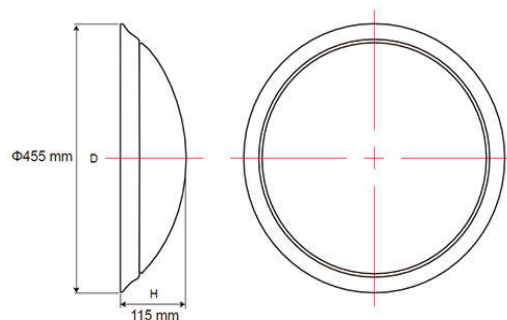

| Model No. | LOK-CLCA22F8 | LOK-CLWA22F8 |
|---------------------|------------------|------------------|
| Input Voltage | 100 ~ 240V | 100 ~ 240V |
| Rated Power | 22 W \pm 10% | 22 W \pm 10% |
| Luminous Flux | 1980lm | 1870 lm |
| Luminous Efficiency | 90 lm/W | 85 lm/W |
| Color Temp. | 6000 \pm 500 K | 3000 \pm 500 K |
| CRI | 80 | 80 |
| Power Factor | >0.9 | >0.9 |
| Beam Angle | 120° | 120° |
| Life time | 30000 hrs | 30000 hrs |
| Dimensions | Ø455X 115mm | Ø 455X 115mm |
| Weight | 1400 \pm 20g | 1400 \pm 20g |
| Operating Temp. | -20°C ~40°C | -20°C ~40°C |
| Material | Iron+ PC Cover | Iron+ PC Cover |


Remarks

- 1.The tolerance of luminous flux is $\pm 10\pm\%$.
- 2.The dimension tolerance is $\pm 5\text{mm}$.
- 3.The appearance and specifications of the product may be modified for improvement without notice.
- 4.All parameters of products are based on the measurement of Laster Tech laboratory.

Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.0


www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196

LUMINOUS INTENSITY DISTRIBUTION

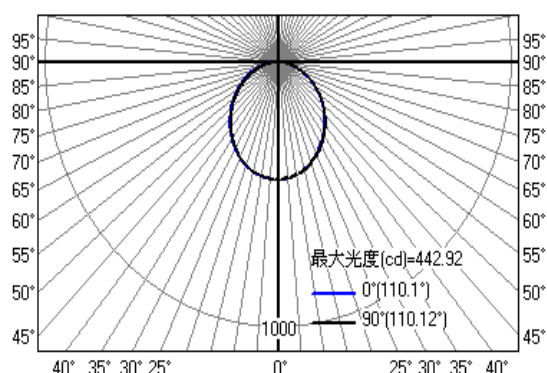

| Lux at a Distance | | | |
|--|--------|---------|---------|
| 1 m | 441 lx | 286 cm | 286 cm |
| 2 m | 110 lx | 573 cm | 573 cm |
| 3 m | 49 lx | 859 cm | 859 cm |
| 4 m | 28 lx | 1145 cm | 1146 cm |
| 5 m | 18 lx | 1432 cm | 1432 cm |
| 6 m | 12 lx | 1718 cm | 1719 cm |
| 7 m | 9 lx | 2004 cm | 2005 cm |
| 8 m | 7 lx | 2291 cm | 2292 cm |
| 9 m | 5 lx | 2577 cm | 2578 cm |
| 10 m | 4 lx | 2863 cm | 2865 cm |
| Vert. Spread: 110.1 deg. Horiz. Spread: 110.1 de | | | |

Installation Instruction

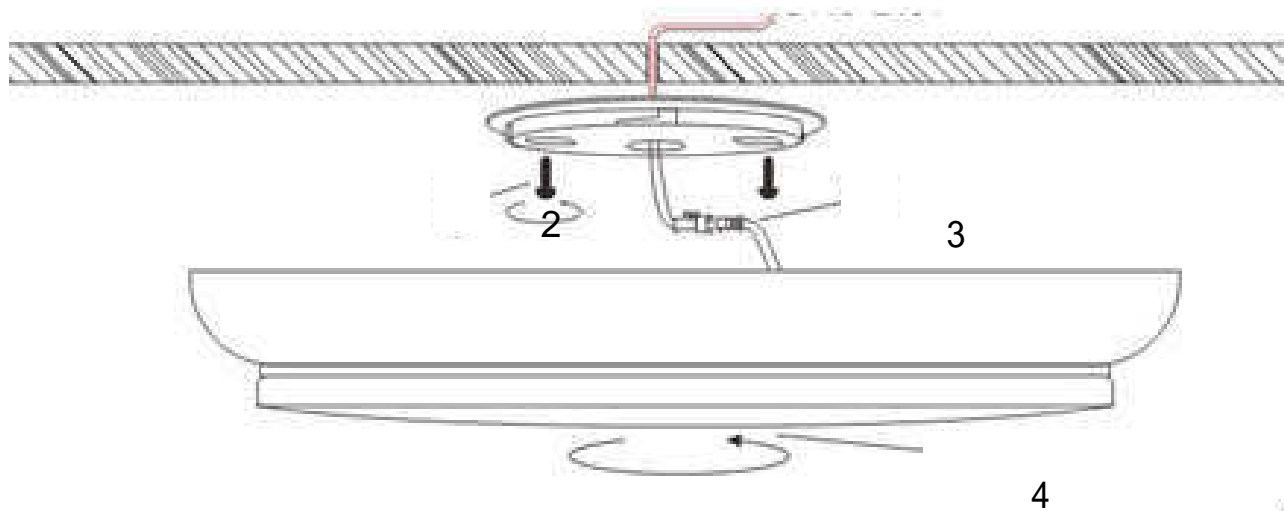

1. Turn off the power
2. Please fix the base on the stable and fixed ceiling, or it will fall or damage.
3. Please connect the input power carefully, incorrect connection will cause fire accident.
4. Keep the lamp body card slot match base card buckle, rotate from left to right, can be easily installed.
5. Please confirm if it installs correctly, then turn on.

Packing Info:

| Model | Inner Box Size | Carton Size | Q'ty/CTN | GW./ CTN |
|-------|----------------|---------------|----------|----------|
| 22W | 460*123*460mm | 645*475*480mm | 5 | 10.2 KG |