



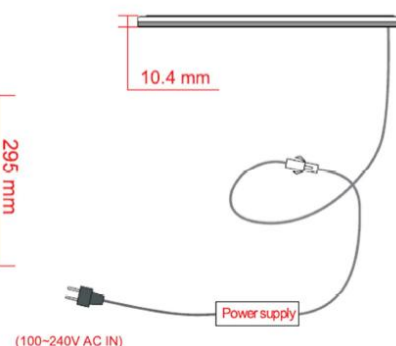

LED Panel Light

Dimensions

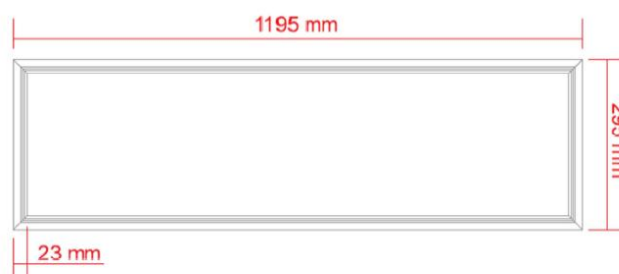

SPECIFICATION

Model No.	LOM-PLC36F8-3C	LOM-PLN36F8-3C	LOM-PLW36F8-3C
Input Voltage	AC 100~240V	AC 100~240V	AC 100~240V
Rated Power	36W±10%	36W±10%	36W±10%
Usable lumens	3040 lm	2750 lm	2750 lm
Lumens per Watt	85 lm/W	75 lm/W	75 lm/W
Color Temp.	6000 ±500K	4000 ±500K	3000 ±500K
CRI	80	80	80
Power Factor	>0.9	>0.9	>0.9
Operating Temp.	-25°C~40°C	-25°C~40°C	-25°C~40°C
Beam Angle	120°	120°	120°
Life time	40000 hrs	40000 hrs	40000 hrs
Dimensions	295* 1195*10.4 mm	295* 1195*10.4 mm	295* 1195*10.4 mm
Weight	3.0k g	3.0k g	3.0k g


Remarks

- 1.The tolerance of luminous flux is ±10%.
- 2.The dimension tolerance is ±5mm.
- 3.The appearance and specifications of the product may be modified for improvement without notice.
- 4.All parameters of products are based on the measurement of Laster Tech laboratory.


Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.2

www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196


LUMINOUS INTENSITY DISTRIBUTION

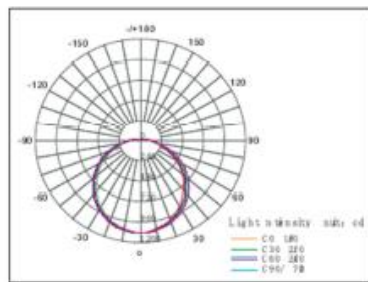

Indoor lamps and lanterns light distribution curve

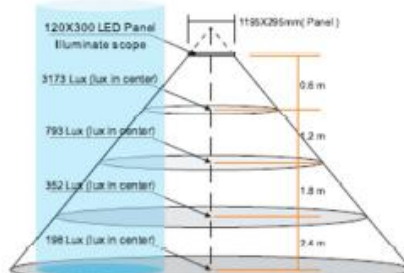



Beam Angle: 110°

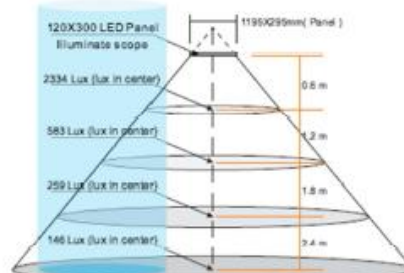

Beam Angle: 110°

Installation Instruction


1. SUSPENDING TYPE



Steps:

- Fixed one end of stainless steel onto the ceiling with anchor bolt.
- Screw the other end of stainless steel into the back cover of LED panel light.


2. EMBEDDED TYPE



Steps:

- Taked of the false ceiling panel, put in the panel from diagonal.
- Fix the panel at the right place.


3. WALL MOUNTING TYPE



Steps:

- Knock the screws into the wall, then installed the fixed parts onto the back cover of the LED panel light.
- Slide the integrity of LED panel light and the fixed parts and lock with the screws.

4. CEILING TYPE

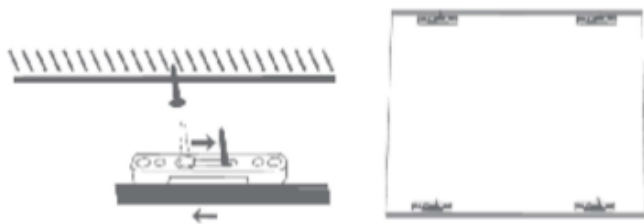

Steps:

- Knock the screws into the wall, then installed the fixed parts onto the back cover of the LED panel light.
- Slide the integrity of LED panel light and the fixed parts and lock with the nail.

Package

