




LED Panel Light

Dimension:

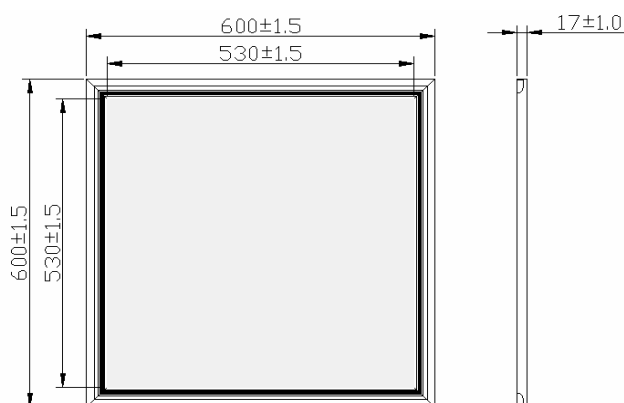



SPECIFICATION

Model No.	LOM-PLC36F8-66	LOM-PLN36F8-66	LOM-PLW36F8-66
Input Voltage	AC 100~265V	AC 100~265V	AC 100~265V
Rated Power	36W±10%	36W±10%	36W±10%
Usable lumens	3040 lm	2750 lm	2750 lm
Lumens per Watt	85 lm/W	75 lm/W	75 lm/W
Color Temp.	6000 ±500K	4000 ±500K	3000 ±500K
CRI	80	80	80
Power Factor	>0.9	>0.9	>0.9
Operating Temp.	-25°C~40°C	-25°C~40°C	-25°C~40°C
Beam Angle	110°	110°	110°
Life time	40000 hrs	40000 hrs	40000 hrs
Dimensions	600 *600*17 mm	600 *600*17 mm	600 *600*17 mm
Weight	2.9 k g	2.9 k g	2.9 k g

Remarks


- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

LUMINOUS INTENSITY DISTRIBUTION

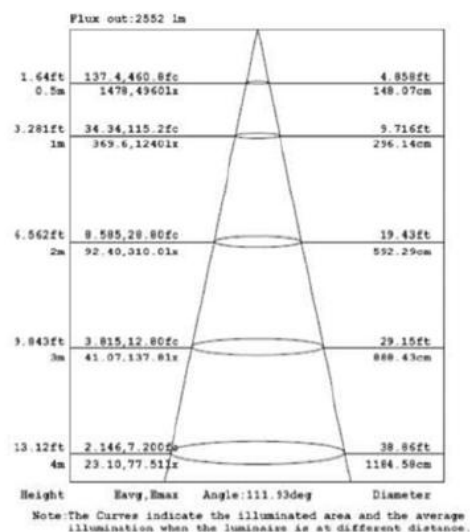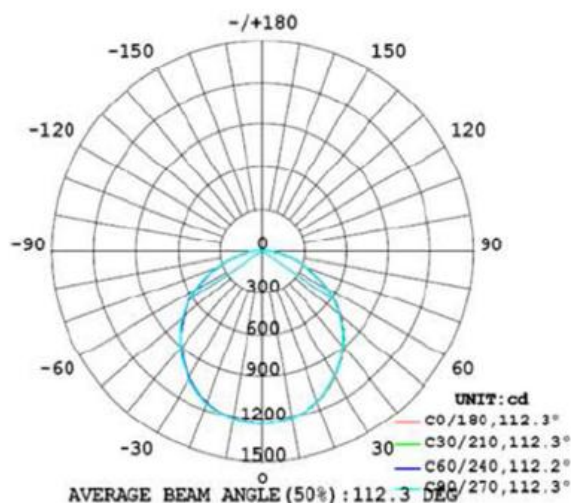

Installation Instruction


1. SUSPENDING TYPE

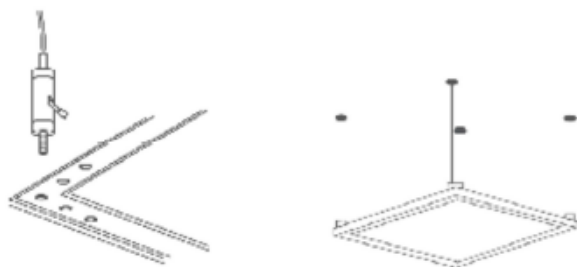

Steps:

- Fixed one end of stainless steel onto the ceiling with anchor bolt.
- Screw the other end of stainless steel into the back cover of LED panel light.

2. EMBEDDED TYPE

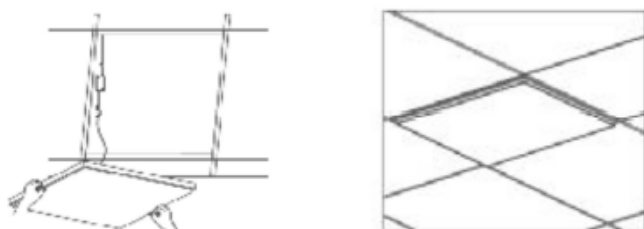

Steps:

- Taked of the false ceiling panel, put in the panel from diagonal.
- Fix the panel at the right place.


3. WALL MOUNTING TYPE



Steps:

- Knock the screws into the wall, then installed the fixed parts onto the back cover of the LED panel light.
- Slide the integrity of LED panel light and the fixed parts and lock with the screws.

4. CEILING TYPE

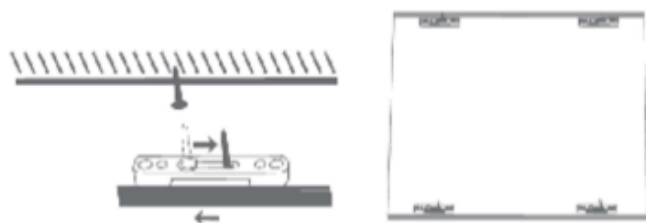

Steps:

- Knock the screws into the wall, then installed the fixed parts onto the back cover of the LED panel light.
- Slide the integrity of LED panel light and the fixed parts and lock with the nail.

Package

Pearly Foam
LED Panel
Pearly Foam

