
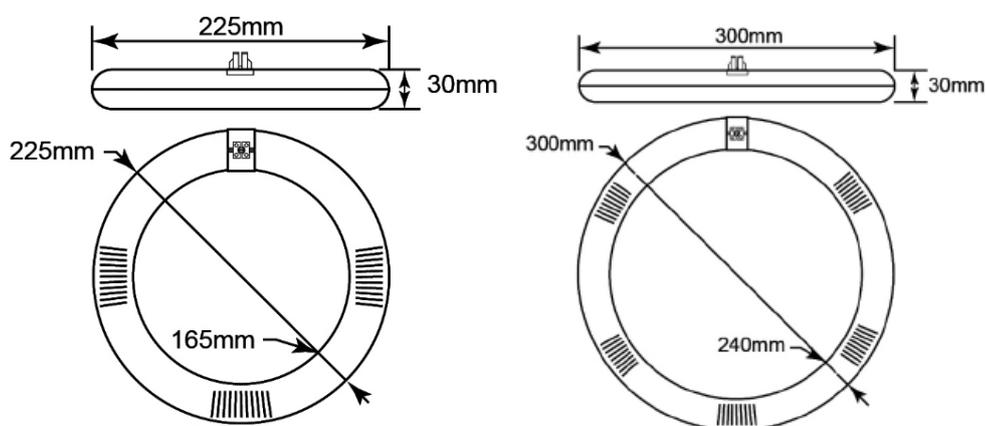


LED Circular Tube

Dimension:

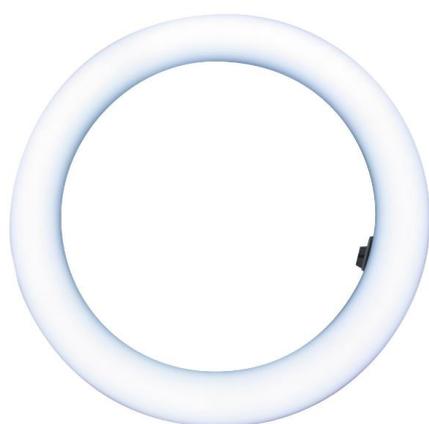

SPECIFICATION

Model No.	LOM-T9C1421F7	LOM-T9C1830F7
Input Voltage	100 ~ 240V	100 ~ 240V
Rated Power	14 W \pm 10%	18 W \pm 10%
Usable lumens	1100 lm	1600 lm
Lumens per Watt	75 lm/W	85 lm/W
Color Temp.	6000 \pm 500 K	6000 \pm 500 K
CRI	\geq 75	\geq 75
Power Factor	>0.9	>0.9
Beam Angle	180 $^{\circ}$ \pm 10%	180 $^{\circ}$ \pm 10%
Life time	40000 hrs	40000 hrs
Dimensions	225 X \emptyset 30mm	299 X \emptyset 30 mm
Weight	265 \pm 20g	265 \pm 20g
Operating Temp.	-25 $^{\circ}$ C~40 $^{\circ}$ C	-25 $^{\circ}$ C~40 $^{\circ}$ C
Lens	Foggy	Foggy

Remarks

1. The tolerance of luminous flux is \pm 10%.

2. The dimension tolerance is \pm 5mm.

3. Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.


Laster Tech Corporation LTD. Building F No.4, Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.0

Product Feature

1. The LED T9 circular Tube are suitable to replace traditional T8/T9 circular fluorescent lamps in fixtures.
2. Comply with CE,ROHS.
3. High efficiency, high energy conservation, no flicker, no noise.
4. Eco-friendly mercury free ,without IR and UV emission.


INSTALLATION

A

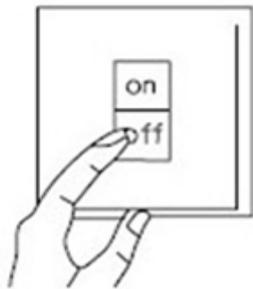

Switch off electricity

B

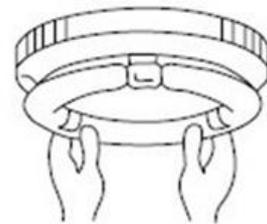


Remove the traditional T8/T9 fluorescent lamps

C



Take off the starter and connecting with AC line

D

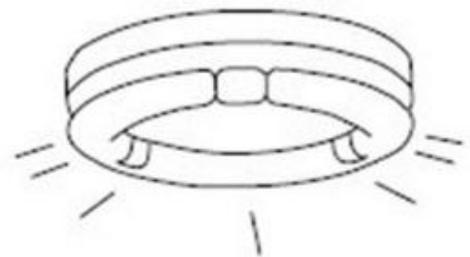

Install retrofit version LED circular tube into the lamp holder and switch on electricity

Wiring Diagram:



Take off the starter