

10W LED PAR30 LAMP



Specification :

Model No.	LOB-PA30C10F8-xx	LOB-PA30N10F8-xx	LOB-PA30W10F8-xx
Input Voltage	AC 100~240(Vac)	AC 100~240(Vac)	AC 100~240(Vac)
Frequency	50/60(Hz)	50/60(Hz)	50/60(Hz)
Rated Power	10W	10W	10W
Luminous Flux	950lm	900lm	900lm
Color Temp.(CCT)	6000K	4000K	2700K
CRI	Ra>80	Ra>80	Ra>80
Beam Angle	25°/60°	25°/60°	25°/60°
Operating Ambient Temp.	-20℃~45℃	-10℃~45℃	-10℃~45℃
Life Time	≥ 30000(HR)	≥ 30000(HR)	≥ 30000(HR)
Base	E27	E27	E27
Material	Pure aluminum	Pure aluminum	Pure aluminum
Dimensions (mm)	Φ95*92mm	Φ95*92mm	Φ95*92mm
Weight	150±20g	150±20g	150±20g
Dimmable	Option	Option	Option


Remarks

- 1.The tolerance of rated power and luminous flux are ±10%.
- 2.The dimension tolerance is ±5mm. 3.The tolerance of color temperature is ±500K
- 4.The appearance and specifications of the product may be modified for improvement without notice.
- 5.All parameters of products are based on the measurement of Laster Tech laboratory.
6. ".xx" in Model No. represents different beam angle are 25°/60°



Product Photo:



Dimension:

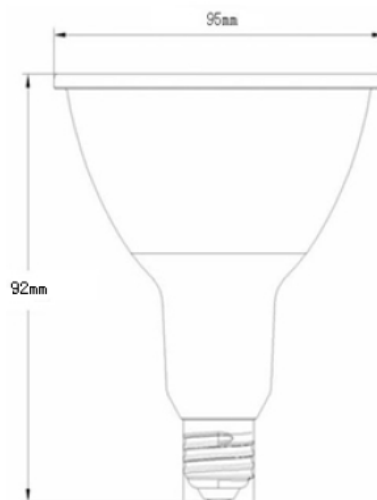

Distribution Plot:

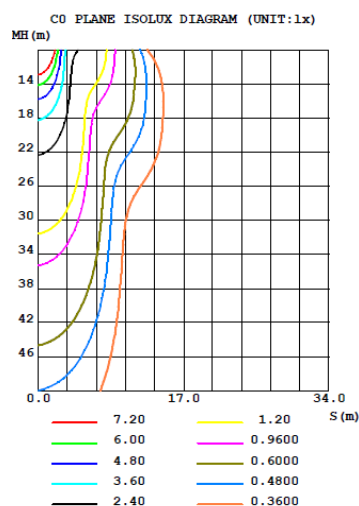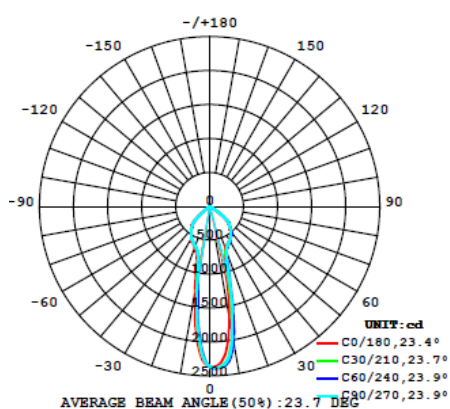

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

