




12W LED Down Light (Square)








Specification					
Model No.	LOR-DLC214S12F8	LOR-DLN214S12F8	LOR-DLW214S12F8		
Input Voltage	AC100-240V				
Rated Power	12W	12W	12 W		
Luminous Flux	1020lm	960lm	900lm		
Luminous Efficiency	85 lm/W	80 lm/W	75 lm/W		
Color Temperature (CCT)	6000±500K	4000±500K	3000±500K		
CRI	Ra80				
Working Temperature Rang	-20°C∼ +40°C				
Power Factor	>0.9				
Life Time	≥ 40000 hrs				
Beam angle	110°				
Cut-out	106mm				
Dimensions /Weight	120.0 *120.0*33.0 mm /345±20 g				
LED driver	Fixed output				
Materials and Finishing	PC diffuser with high light transmission,				
	High reflectance aluminum reflector (White Color)				


^{1.} The tolerance of luminous flux is ±10%. 2. The dimension tolerance is ±5 mm.

^{3.}The appearance and specifications of the product may be modified for improvement without notice.




LUMINOUS INTENSITY DISTRIBUTION





Installation Instruction

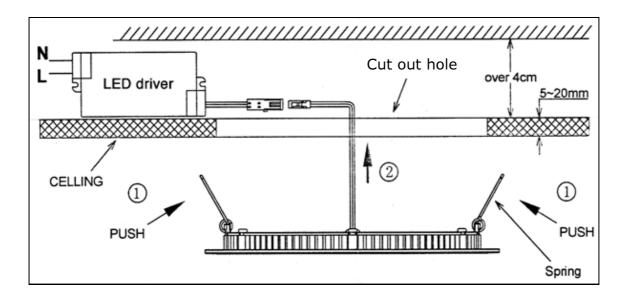

Product Package

Packing	Dimension(mm)	Quantity(pcs)	Net Weight(kg)	Gross Weight(kg)
Large Carton	530*280*425	40	13.60	18.40