




LED Circular module (22W)

Dimension:



Model No.	LFM-KitC2227	LFM- KitW2227
Input Voltage	AC220 ~ 240V	AC220 ~ 240V
Rated Power	22 W±10%	22 W±10%
Luminous Flux	2400lm	2200 lm
Luminous Efficiency	110 lm/W	100 lm/W
Color Temp.	6500±500 K	3000±500 K
CRI	80	80
Power Factor	>0.5	>0.5
Beam Angle	160°	160°
Life time	15000 hrs	15000 hrs
Dimensions	Ø215X 215mm	Ø 215X 215mm
Weight	350±20g	350±20g
Operating Temp.	-20℃ ~40℃	-20℃ ~40℃
Material	Iron+ PC Cover	Iron+ PC Cover



Remarks

- 1.The tolerance of luminous flux is ±10±%.
- 2.The dimension tolerance is ±5mm.
- 3.The appearance and specifications of the product may be modified for improvement without notice.
- 4.All parameters of products are based on the measurement of Laster Tech laboratory.


Laster Tech Corporation LTD. Building F No.4,Minxiang St., Zhonghe City, Taipei County 235, Taiwan V1.0

www.sweeo.com TEL:+886-2-22226112 FAX:+886-2-22226196

LUMINOUS INTENSITY DISTRIBUTION

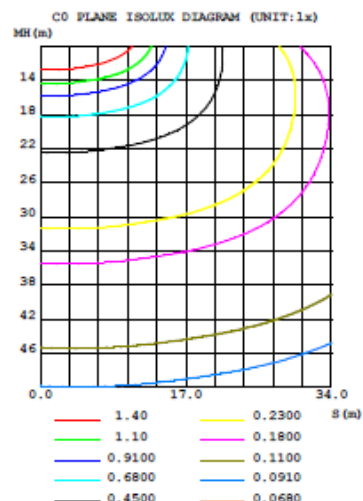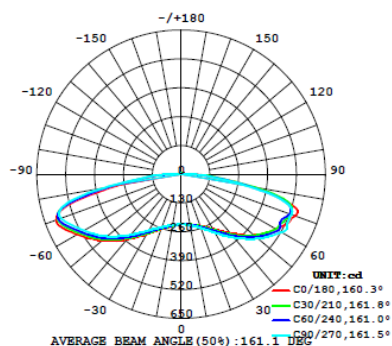

Installation Instruction

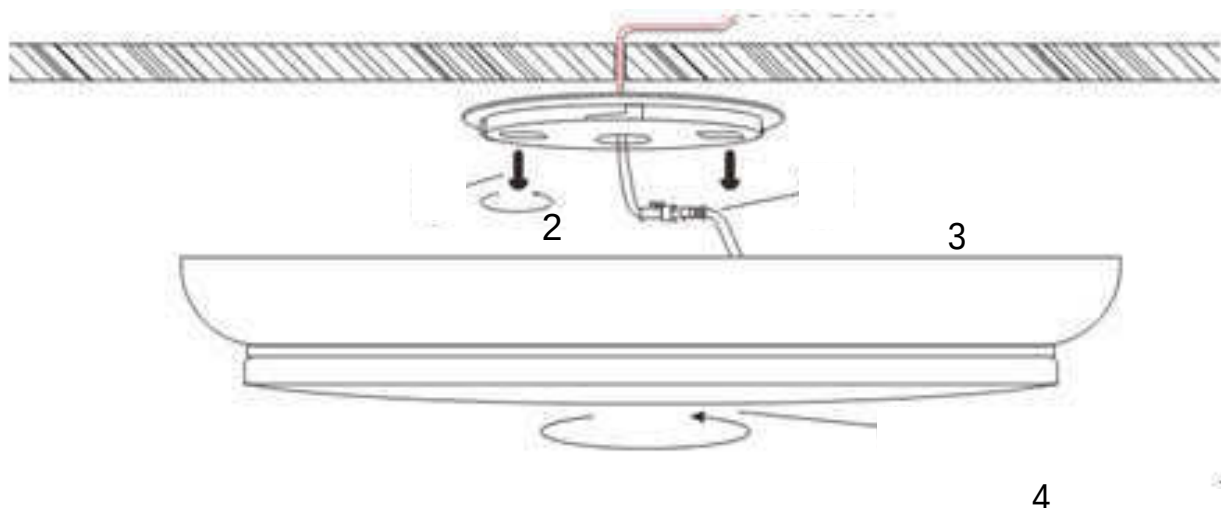

1. Turn off the power
2. Please fix the base on the stable and fixed ceiling, or it will fall or damage.
3. Please connect the input power carefully, incorrect connection will cause fire accident.
4. Keep the lamp body card slot match base card buckle, rotate from left to right, can be easily installed.
5. Please confirm if it installs correctly, then turn on.

Package

Packing	Dimension(mm)	Quantity(pcs)
Large Carton	430*375*260	30