




LED CANDLE LIGHT (5W)



Dimension:

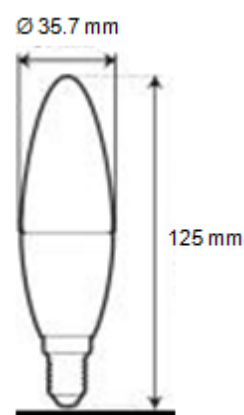



Specification

Model No.	LOB-CAC0528- EXXX	LOB-CAN0528-EXXX	LOB-CAW0528-EXXX
Input Voltage	AC100/230V	AC100/230V	AC100/230V
Rated Power	5W±10%	5 W±10%	5 W±10%
Total Lumens	C:350 lm ,F:300 lm	C:350lm, F:300 lm	C:270lm, F:240 lm
Lumens Efficiency	C:70lm /W, F:60 lm/W	C:70lm /W, F:60 lm/W	C:54lm /W, F:48 lm/W
Color Temp.	5800~6300K	4000~4500K	2700 ~3200K
CRI	≥ 70	≥ 70	≥ 70
Operating Temp.	-25°C~40°C	-25°C~40°C	-25°C~40°C
Base	E27/E14	E27/E14	E27/E14
Life Time	≥ 30000 hrs	≥ 30000 hrs	≥ 30000 hrs
Beam angle	120°	120°	120°
Dimensions	37.5(W) *125(H) mm	37.5(W) *125(H) mm	37.5(W) *125(H) mm
Weight	47±20 g	47±20 g	47±20 g
Lens Type	Clear/Foggy	Clear/Foggy	Clear/Foggy

Remarks

- 1.The tolerance of luminous flux is ±10%.
2. The dimension tolerance is ±5mm.
- 3.Laster Tech Corporation LTD. All rights reserved. Product specifications are subject to change without notice.

Light Distribution Curve

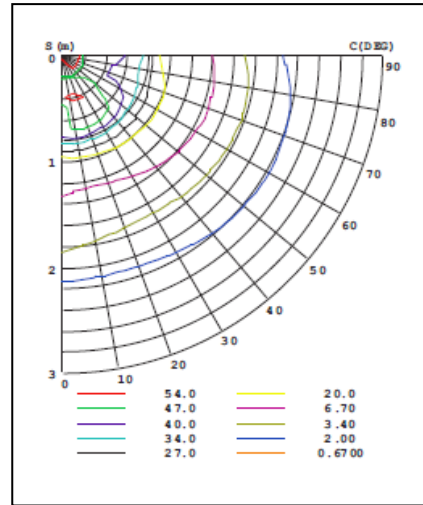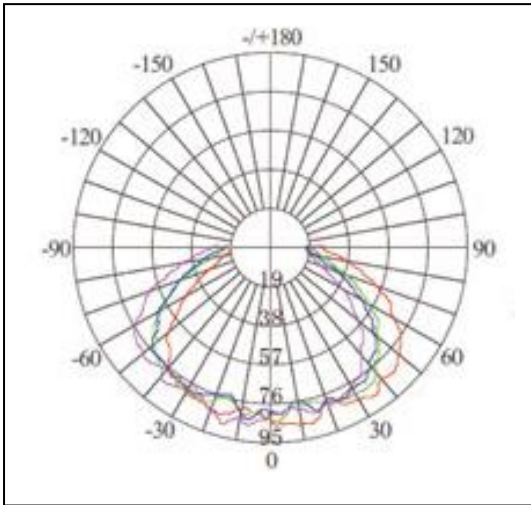

Package

Carton:100pcs Unit Boxes

